

## Rope tensioning clamp

### Product information



**General:** For safe and careful installation, tensioning or pulling of ropes. The tension spring construction allows to position the clip on the rope without any additional fixing and maintains the grip on the rope even if the rope is unloaded.

**Nominal size:** 4-10 with round hole

**Nominal size:** 16-38 with oval hole


**Features:**

- Hardened clamping shoes.
- Clamping shoes with deep and sharp teeth.
- Tension spring for easy positioning.

**Finish:** Electro galvanized. Shoes browned.

**Note:** Before every use the clamping shoes and rope should be cleaned. Please take care that no grease or oil is on the connection.

**Warning:** Not to be used for lifting.

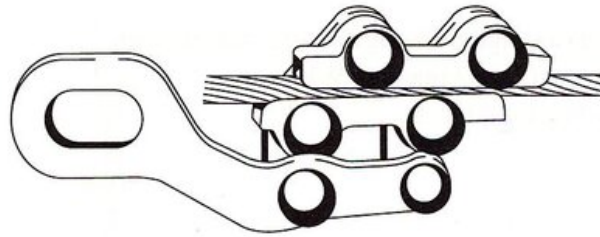

Part code	Rope Ø range mm	Type	W mm	Rope cross section mm <sup>2</sup>	b mm	c mm	d mm	h closed	h open	h opening	l mm	w mm	Weight kg
140500400030	1-4	RTC4	19	1 - 16	36	15	19	47	51	6.5	124	19	0.25
140500800030	3-8	RTC8	20	6 - 35	47	21	20	76	82	10	169	20	0.85
140501000030	5-10	RTC10	18	16 - 70	44	24	18	80	88	12	195	18	1.1
140501600030	8-16	RTC16	39	50 - 150	54	25	30	83	97	19	245	39	1.8
140502600030	12-26	RTC26	38	95 - 400	62	31	29	107	130	26	265	38	3.5
140503800030	20-38	RTC38	38	240 - 800	62	36	29	126	153	40	286	38	6.5

## Blueprint

