


## Wire Rope Sling - With Thimbles

### Product information

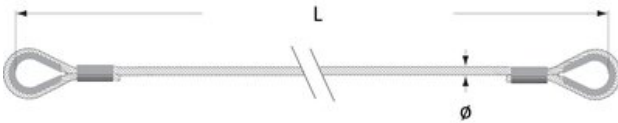

- Galvanized steel wire rope
- Proof load test at twice the nominal load
- Large opening thimbles up to  $\varnothing$  29 mm
- AFNOR thimbles from  $\varnothing$  32 mm
- Non-deformable reinforced thimbles on request
- Steel wire rope composition and diameter can vary to ensure availability
- The Working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

**Marking:** According to standard

**Standard:** EN 13414-1

**Safety factor:** 5:1

**Part Code**

**WLL  
ton**

1603

0.5

1603

0.65

1603

0.8

1603

1

1603

1.2

1603

1.4

1603

1.8

1603

2.12

1603

2.7

1603

3.4

1603

4.35

1603

5.2

1603

6.3

1603

7.2

1603

9

1603

11

1603

13.5

1603

15

1603

17

1603

19

1603

22.5

1603

25

1603

27

1603

29.5

1603

34.5

1603

43

1603

55

1603

65

