


## Wire Rope Sling - With Hook and Masterlink

### Product information

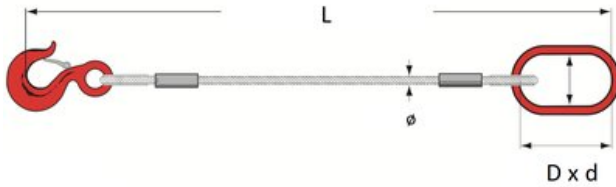

- Galvanized steel wire rope
- Alloy steel hook and masterlink
- On request hook with safety latch or self-locking hook
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).

**Marking:** According to standard

**Standard:** EN 13414-1

**Safety factor:** 5:1

**Part Code**

**WLL  
ton**

1603

0.5

1603

0.65

1603

0.8

1603

1

1603

1.2

1603

1.4

1603

1.8

1603

2.12

1603

2.7

1603

3.4

1603

4.35

1603

5.2

1603

6.3

1603

7.2

1603

9

1603

11

1603

13.5

1603

15

1603

17

1603

19