


Wire Rope Sling - With Eye

Product information

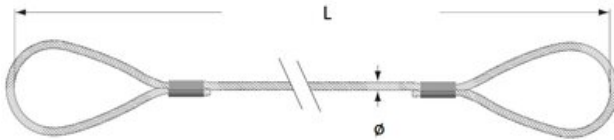

- Galvanized steel wire rope
- Proof load test at twice the nominal load.
- The inner length of a loop is equal to 20 times the diameter of the wire rope.
- The working load limit (WLL) is calculated according to EN 13414-1 / A1. It can be modified according to the class of resistance of the wire rope used (1770 or 1960 MPa).
- Steel wire rope composition and diameter can vary to ensure availability

Marking: According to standard

Standard: EN 13414-1

Safety factor: 5:1

| Part Code | WLL ton |
|-----------|---------|
| 1603 | 0.5 |
| 1603 | 0.65 |
| 1603 | 0.8 |
| 1603 | 1 |
| 1603 | 1.2 |
| 1603 | 1.4 |
| 1603 | 1.8 |
| 1603 | 2.12 |

| | |
|------|------|
| 1603 | 2.7 |
| 1603 | 3.4 |
| 1603 | 4.35 |
| 1603 | 5.2 |
| 1603 | 6.3 |
| 1603 | 7.2 |
| 1603 | 9 |
| 1603 | 11 |
| 1603 | 13.5 |
| 1603 | 15 |
| 1603 | 17 |
| 1603 | 19 |
| 1603 | 22.5 |
| 1603 | 25 |
| 1603 | 27 |
| 1603 | 29.5 |
| 1603 | 34.5 |
| 1603 | 43 |
| 1603 | 55 |
| 1603 | 65 |
| 1603 | 100 |
| 1603 | 125 |