

DURApplus 6SP

Product information



DURApplus 6SP has a specific construction adapted for the logging application.


- Heavy swaged rope ; IWRC steel core
- Outer roundness surface
- Ultrahigh flexibility
- Very high MBL
- Robust Resistant to the deformation

Features: Ultra-high flexibility

Rope construction: 6 x 26 WS + IWRC

Note: Can be used to manufacture flexible lifting slings

Tolerance Ø: +1% to +4%

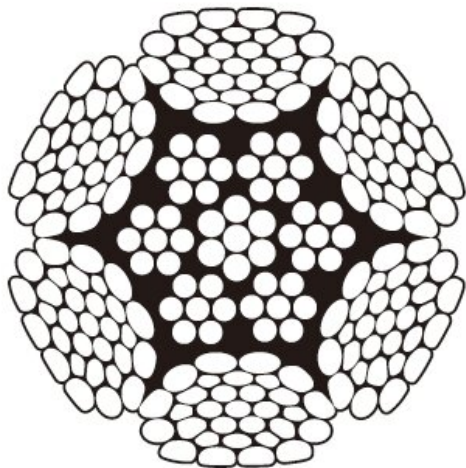

Part Code	Rope Diameter, mm	Tensile strength N/mm ²	Finish	Rope lay.	Min. Breaking force kN	Steel area mm ²	Lubrication	Weight kg/100m
103101004070389	10	1,960	Bright	sZ	95	60.2	SupplierStandard	0.51
103101104070389	11	1,960	Bright	sZ	112	71.4	SupplierStandard	0.6
103101204070389	12	1,960	Bright	sZ	132	82.6	SupplierStandard	0.7
103101304070389	13	1,960	Bright	sZ	156	97	SupplierStandard	0.82
103101404070389	14	1,960	Bright	sZ	180	112	SupplierStandard	0.95
103101504070389	15	1,960	Bright	sZ	210	130	SupplierStandard	1.1
103101604070389	16	1,960	Bright	sZ	238	147	SupplierStandard	1.24