


ROV Release Polar Shackle w/Locking Clamp P-5365

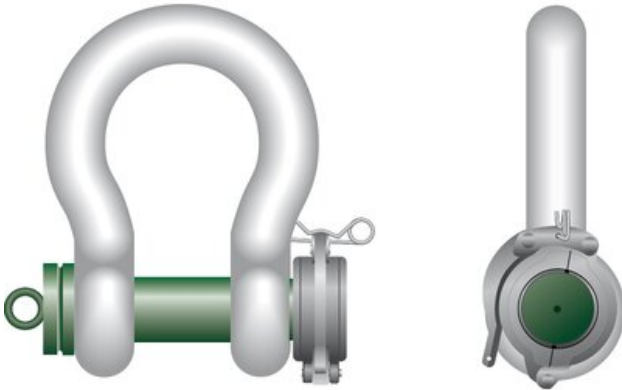

Product information

Bow release shackle with locking clamp.

Safety factor: 6:1 up til WLL 85 ton. 5:1 for 120 ton and up.

Material: Bow and pin alloy steel

Marking: CE-marked

Temperature range: -60°C up to +200°C

Finish: Bow white painted, pin green painted

Note: Supplied without wires; design you own wiring plan

Grade: 8

| Part Code | WLL ton | a mm | b mm | c mm | d mm | e mm | f mm | g mm | h mm | i mm | j mm | k mm | Weight kg |
|--------------|---------|------|------|------|------|------|------|------|------|------|------|------|-----------|
| 420100650810 | 6.5 | 22 | 25 | 52 | 22 | 36 | 83 | 58 | 164 | 140 | 102 | 45 | 2.27 |
| 420100950810 | 9.5 | 28 | 32 | 66 | 28 | 47 | 108 | 75 | 200 | 172 | 131 | 48 | 4.25 |
| 420101200810 | 12 | 32 | 35 | 72 | 32 | 51 | 115 | 83 | 213 | 184 | 147 | 48 | 5.36 |
| 420101700810 | 17 | 38 | 42 | 88 | 38 | 60 | 146 | 99 | 266 | 209 | 175 | 48 | 9.27 |
| 420102500810 | 25 | 45 | 50 | 103 | 45 | 74 | 178 | 126 | 309 | 243 | 216 | 48 | 14.62 |
| 420103500810 | 35 | 50 | 57 | 116 | 50 | 83 | 197 | 138 | 350 | 269 | 238 | 48 | 20.75 |
| 420104250810 | 42.5 | 57 | 65 | 130 | 57 | 95 | 222 | 160 | 377 | 301 | 274 | 48 | 28.33 |
| 420105500810 | 55 | 65 | 70 | 145 | 65 | 105 | 260 | 180 | 440 | 329 | 310 | 48 | 41 |
| 420108500810 | 85 | 75 | 83 | 162 | 75 | 127 | 329 | 190 | 527 | 375 | 340 | 48 | 61 |
| 420112000810 | 120 | 95 | 95 | 208 | 91 | 147 | 400 | 238 | 647 | 440 | 428 | 60 | 110 |
| 420115000810 | 150 | 105 | 108 | 238 | 102 | 169 | 410 | 275 | 688 | 490 | 485 | 60 | 160 |
| 420120000810 | 200 | 120 | 130 | 279 | 113 | 179 | 513 | 290 | 838 | 520 | 530 | 60 | 235 |
| 420125000810 | 250 | 130 | 140 | 299 | 118 | 205 | 554 | 305 | 904 | 560 | 565 | 60 | 285 |

Blueprint

