


## DURAhoist 24C

### Product information



- Rotation-resistance properties to use without swivel
- 12-strand compacted rope, lubricated during stranding and closing
- High resistance to crushing and abrasion
- Achieves very good bending fatigue results and good flexibility
- High breaking load resistance


**Rope construction:** 24x7, Warrington steel core

**Marking:** According to standard

**Standard:** EN 12385-4

**RCN:** 23-1

**Tolerance Ø:** +1% to +4%

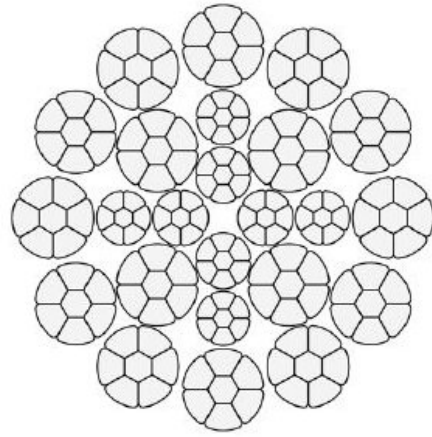

Luffing crane



Self-erected crane



Tower crane



Part Code	Rope Diameter, mm	Tensile strength N/mm <sup>2</sup>	Finish	Rope lay.	Min. Breaking force, kN	Steel area mm <sup>2</sup>	Lubrication	Weight kg/100m
104100726270249	7.2	1,960	Galvanized	zZ	42	29	SupplierStandard	0.22
104100806270249	8	1,960	Galvanized	zZ	56	35.8	SupplierStandard	0.28
104100906270249	9	1,960	Galvanized	zZ	71	45.4	SupplierStandard	0.36
104101006270249	10	1,960	Galvanized	zZ	88	56	SupplierStandard	0.46
104101106270249	11	1,960	Galvanized	zZ	107	67.8	SupplierStandard	0.56
104101206270249	12	1,960	Galvanized	zZ	127	80.6	SupplierStandard	0.67
104101306270249	13	1,960	Galvanized	zZ	149	94.6	SupplierStandard	0.78
104101406270249	14	1,960	Galvanized	zZ	175	109.8	SupplierStandard	0.91
104101606270249	16	1,960	Galvanized	zZ	226	143.4	SupplierStandard	1.2
104101806270249	18	1,960	Galvanized	zZ	286	181.4	SupplierStandard	1.48
104102006270249	20	1,960	Galvanized	zZ	353	224	SupplierStandard	1.88