


DURAhoist 24C

Product information



- Rotation-resistance properties to use without swivel
- 12-strand compacted rope, lubricated during stranding and closing
- High resistance to crushing and abrasion
- Achieves very good bending fatigue results and good flexibility
- High breaking load resistance


Rope construction: 24x7, Warrington steel core

Marking: According to standard

Standard: EN 12385-4

RCN: 23-1

Tolerance Ø: +1% to +4%

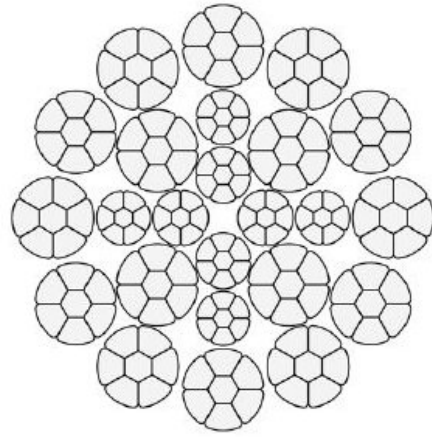

Luffing crane



Self-erected crane



Tower crane



Part Code	Rope Diameter, mm	Tensile strength N/mm ²	Steel area mm ²	Min. Breaking force kN.	Finish	Weight kg/100m	Delivery time
104100726270249	7.2	1,960	-	-	Galvanized	-	-
104100806270249	8	1,960	-	-	Galvanized	-	-
104100906270249	9	1,960	-	-	Galvanized	-	-
104101006270249	10	1,960	-	-	Galvanized	-	-
104101106270249	11	1,960	-	-	Galvanized	-	-
104101206270249	12	1,960	-	-	Galvanized	-	-
104101306270249	13	1,960	-	-	Galvanized	-	-
104101406270249	14	1,960	-	-	Galvanized	-	-
104101606270249	16	1,960	-	-	Galvanized	-	-
104101806270249	18	1,960	-	-	Galvanized	-	-
104102006270249	20	1,960	-	-	Galvanized	-	-